


SC-TR40-B

Used in commercial zoning applications

The SC-TR40-B is a 40 VA, 240/208/120 to 24 VAC transformer used in low voltage applications. The transformer is factory mounted to a 4" x 4" junction box for primary wiring.

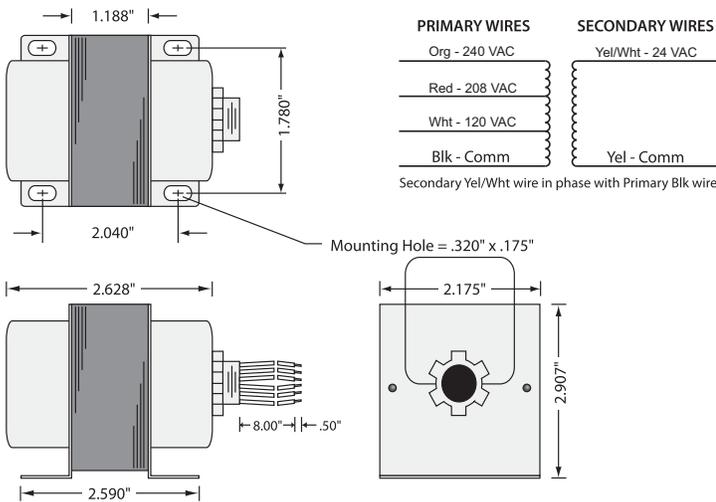

SPECIFICATIONS

- VA Rating:** 40VA
- Frequency:** 50/60 Hz
- Mounting:** Foot & Single Threaded Hub
TRMP44K0 Mounting Plate Provided
- Over Current Protection:** Thermal Fuse (Fuse not field replaceable)
- Dimensions:** 2.628" x 2.175" x 2.907" (w/ .500" NPT Hub)
- Wire Length:** 8" Typical w/ .5" Strip
- Operating Temperature:** -30 to 140° F
- MTBF:** 100,000 Hours @ 77° F
- Construction:** Split-Bobbin
- Weight:** 2.20 lbs.
- Approvals:** Class 2 UL5085-3 Listed, C-UL, CE, RoHS