

SC-BAL-XX

Used in air balancing applications

APPLICATION:

The SC-BAL-XX is a round, remote powered balancing damper designed to balance air flow in a HVAC system. The SC-BAL-XX is ideally suited for applications where balancing dampers are located in finished ceilings or simply difficult to access and adjust manually. A hand-held remote control positioner equipped with a 9 volt power supply (SC-BAL-C) operates the damper actuator via a plug-in RJ11 cable terminating at an optional wall box, round ceiling plate or diffuser connector.

FEATURES:


- No field power required
- Built-in dual RJ11 connectors on actuator
- Wide range of sizes

DAMPER SPECIFICATIONS:


Available Sizes:	4", 5", 6", 7", 8", 10", 12", 14", 16", 18"
Damper Shell:	20 gauge galvanized steel
Actuator Bracket:	18 gauge galvanized steel
Damper Blade:	24 gauge galvanized steel
Shaft:	1/2" solid aluminum
Body Length:	8"
Bushings:	Bronze Oilite
Gasket:	Low leakage
Leakage:	Class 2 - 10 cfm/ft ² @ 1" w.g. (3 cmm/m ² @ .25 kPa)
Maximum Static Pressure:	2" W.C.
Maximum System Velocity:	2,000 FPM
Actuator:	Factory mounted, 9 volt, gear driven, fail in place motor with dual RJ11 connectors



**SC-BAL-C
REMOTE CONTROL
POSITIONER**

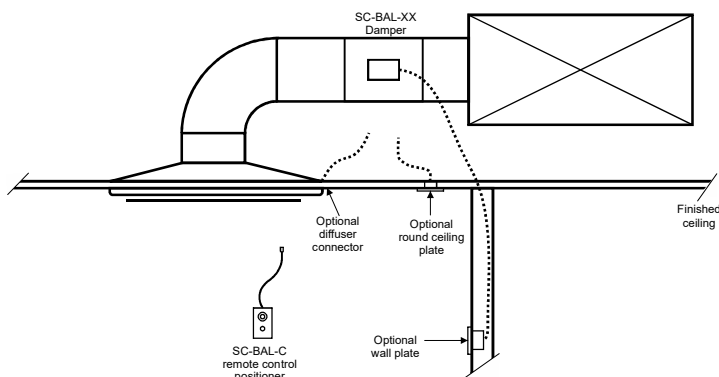

DAMPER SIZING CHART

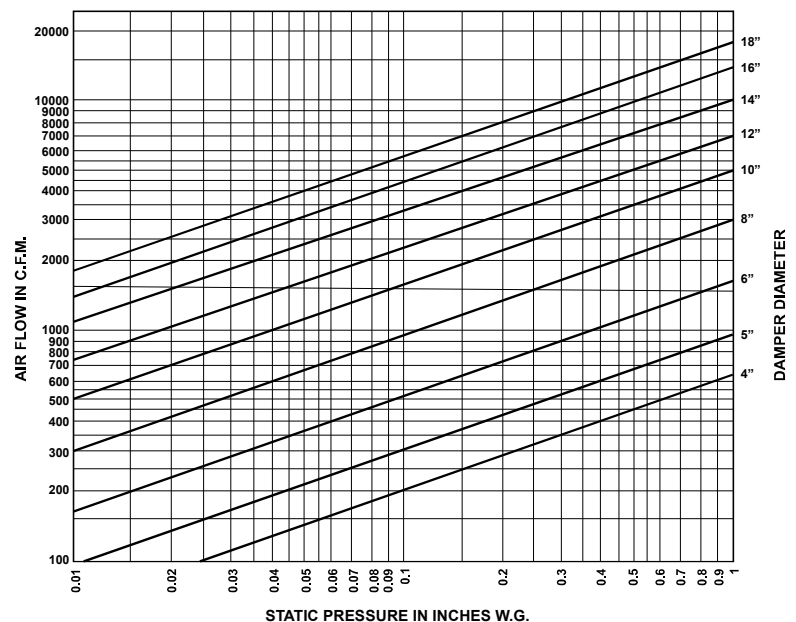

ACCESSORIES

SC-BAL-C REMOTE CONTROL POSITIONER

Hand-held remote control positioner equipped with 9 volt power supply. Operates the damper actuator via a RJ11 cable that plugs into a wall box, round ceiling plate or diffuser connector. Controller has a calibrated damper position dial and power activation button.



SC-BAL-C

SC-BAL-PORT

Feed-through in-line coupler modular jack. (6-position 6-conductor) Connects two modular cords; Pin 1 to Pin 1. Compatible with RJ11 jacks and plugs. Can also be used as a diffuser connector or with wall plates.



SC-BAL-PORT

SC-BAL-RP ROUND WHITE WALL/CEILING PLATE

Round RJ11 Wall Plate with built-in RJ11 jack. Gold-plated Screw Terminal Contacts. High-Impact ABS Plastic. 3.25 Inch Diameter



SC-BAL-RP

SC-BAL-W SILVER SATIN LINE CORD

Made of the finest PVC material. Cords are RoHS approved and come with RJ11 connectors.

Lengths:

SC-BAL-W7 - 7'

SC-BAL-W14 - 14'

SC-BAL-W25 - 25'




SC-BAL-W

WHITE PLASTIC WALL PLATES (SC-BAL-PP)

Configured to fit single or standard double gang outlet box. Rugged and durable construction. Used with SC-BAL-PORT modular snap-in connectors. UL Listed




SC-BAL-PP1 SC-BAL-PP2 SC-BAL-PP3 SC-BAL-PP4 SC-BAL-PP6



SC-BAL-PP12

STAINLESS STEEL WALL PLATES (SC-BAL-SP)

Configured to fit standard single gang outlet box. Offers a flush face surface. Used with SC-BAL-PORT modular snap-in connectors.

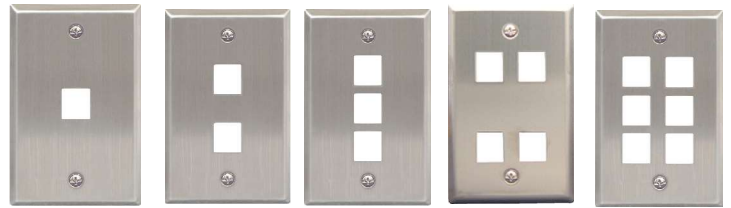

SC-BAL-SP1 SC-BAL-SP2 SC-BAL-SP3 SC-BAL-SP4 SC-BAL-SP6

SUGGESTED SPECIFICATION:

Furnish and install as shown on plans or in accordance with schedules, remote control operated balancing dampers SC-BAL-XX round or SC-BAL-XXX rectangular as manufactured by Specified Controls, LLC, Indianapolis, IN 46237. (www.specifiedcontrols.com) Damper actuators shall be powered by a 9 volt battery operated remote control positioner (SC-BAL-C) that plugs into a RJ11 connector located on a ceiling plate, wall box or diffuser. Refer to accessory options as specified and available from Specified Controls, LLC.

**SPECIFIED
CONTROLS**

5351 East Thompson Road
Suite 128

Indianapolis, IN 46237
888.359.0365

www.specifiedcontrols.com

SC-08-1284-091520