


Submittal Sheet

JOB NAME _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
LOCATION _____

SC-OAD-XX

EXHAUST OR
FRESH AIR
DAMPER

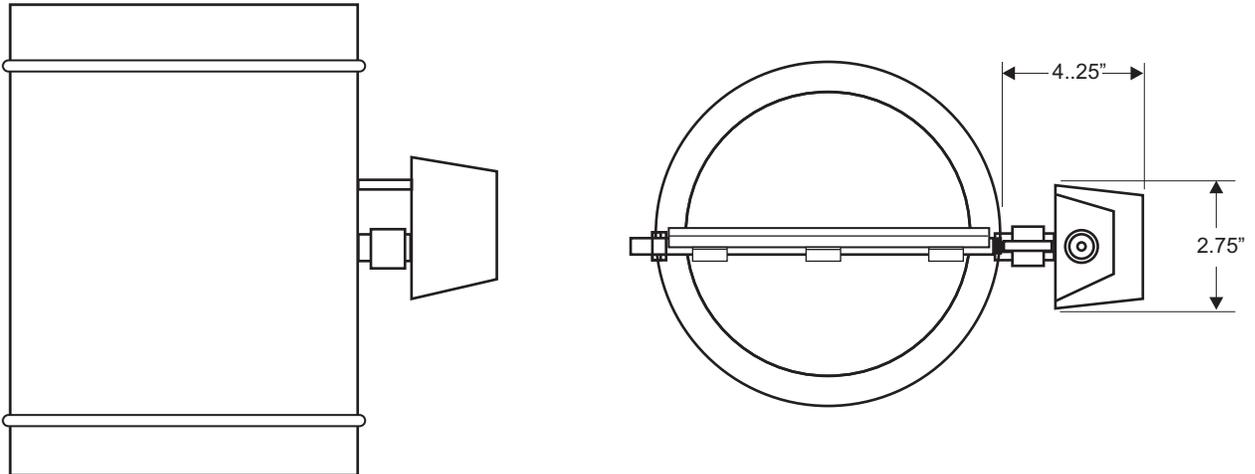

The SC-OAD-XX is designed for retrofit or new construction applications requiring exhaust, fresh air intake and on-off zone control. Typical application use includes bathrooms or restrooms in high rise hotels, office buildings and apartment buildings. The damper includes a direct coupled, spring return actuator available in 24 VAC or 120 VAC. Made in the U.S.A.

DAMPER SPECIFICATIONS:

Available Sizes:	4", 6", 8", 10", 12", 14", 16", 18"
Damper Shell:	20 gauge galvanized steel
Damper Blade:	24 gauge galvanized steel
Shaft:	1/2" solid aluminum
Body Length:	8"
Gasket:	Low leakage
Bushings:	Bronze Oilite

ELECTRICAL

24 Volt, 10 VA, 0.43 Amp powered closed, spring return open actuator
Can be supplied with 120 Volt actuator (120 Volt, 60Hz, 6 Watts)
Also available in powered open, spring return closed
Motor is impedance protected with no end switches

**SPECIFIED
CONTROLS**



5351 E. Thompson Road Box 128
Indianapolis, IN 46237
www.specifiedcontrols.com
Phone: 888.359.0365