
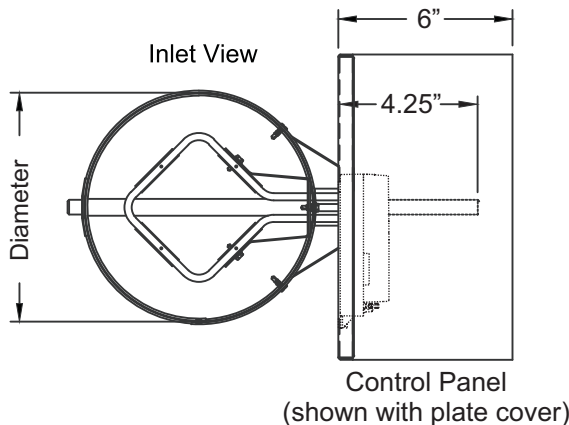



Submittal Sheet

JOB NAME _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 LOCATION _____



SC-PIZ-XX PRESSURE INDEPENDENT ZONE ONE DAMPER

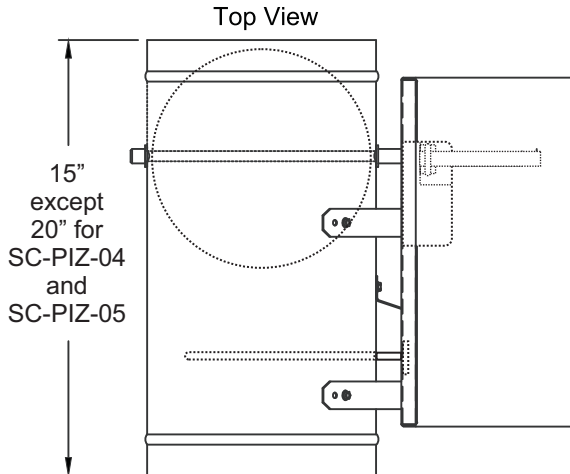

Model Number	Inlet Diameter	
	in.	mm
SC-PIZ-04	3.88	99
SC-PIZ-05	4.88	124
SC-PIZ-06	5.88	149
SC-PIZ-08	7.88	200
SC-PIZ-10	9.88	251
SC-PIZ-12	11.88	302
SC-PIZ-14	13.88	353
SC-PIZ-16	15.88	403

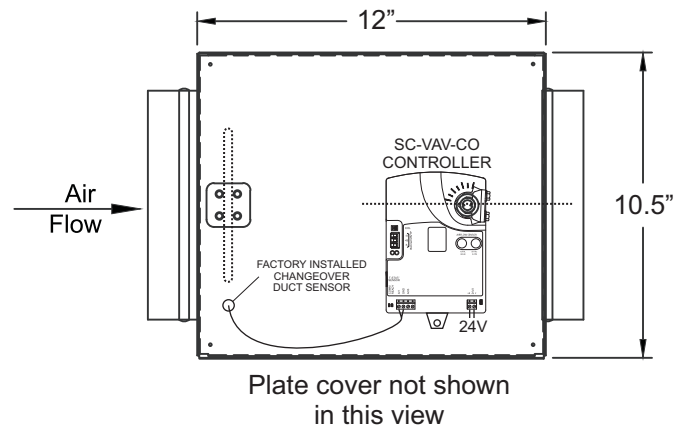

Note:
 SC-PIZ-04 and SC-RAT-05 have round 4" or 5" transitions respectively on the inlet of a SC-PIZ-06 with low flow sensors. An optional transition is available for the discharge end.



The SC-VAV-STAT can be used as a permanent digital wall-mounted temperature controller or as a service tool to set up the SC-VAV-CO Controller. See SC-VAV-STAT Submittal sheet for more information.

STANDARD CONSTRUCTION

- Units are constructed with 22 gauge galvanized steel and 18 gauge damper assembly, integral blade seal, control panel and cover.

OPTIONAL CONSTRUCTION

- Optional stainless steel construction available.

SPECIFIED CONTROLS

5351 E. Thompson Road Box 128
 Indianapolis, IN 46237
www.specifiedcontrols.com
 Phone: 888.359.0365